


Project / Model
25.008
20" Lubrication Truck

Info
MWS 2.1

Date : 20.01.2025
Rev. : 00.00
Per. : Metin ALCAR
Tel. : 0544 242 04 91
Mail : yavuz@aluratrailer.com

A 01

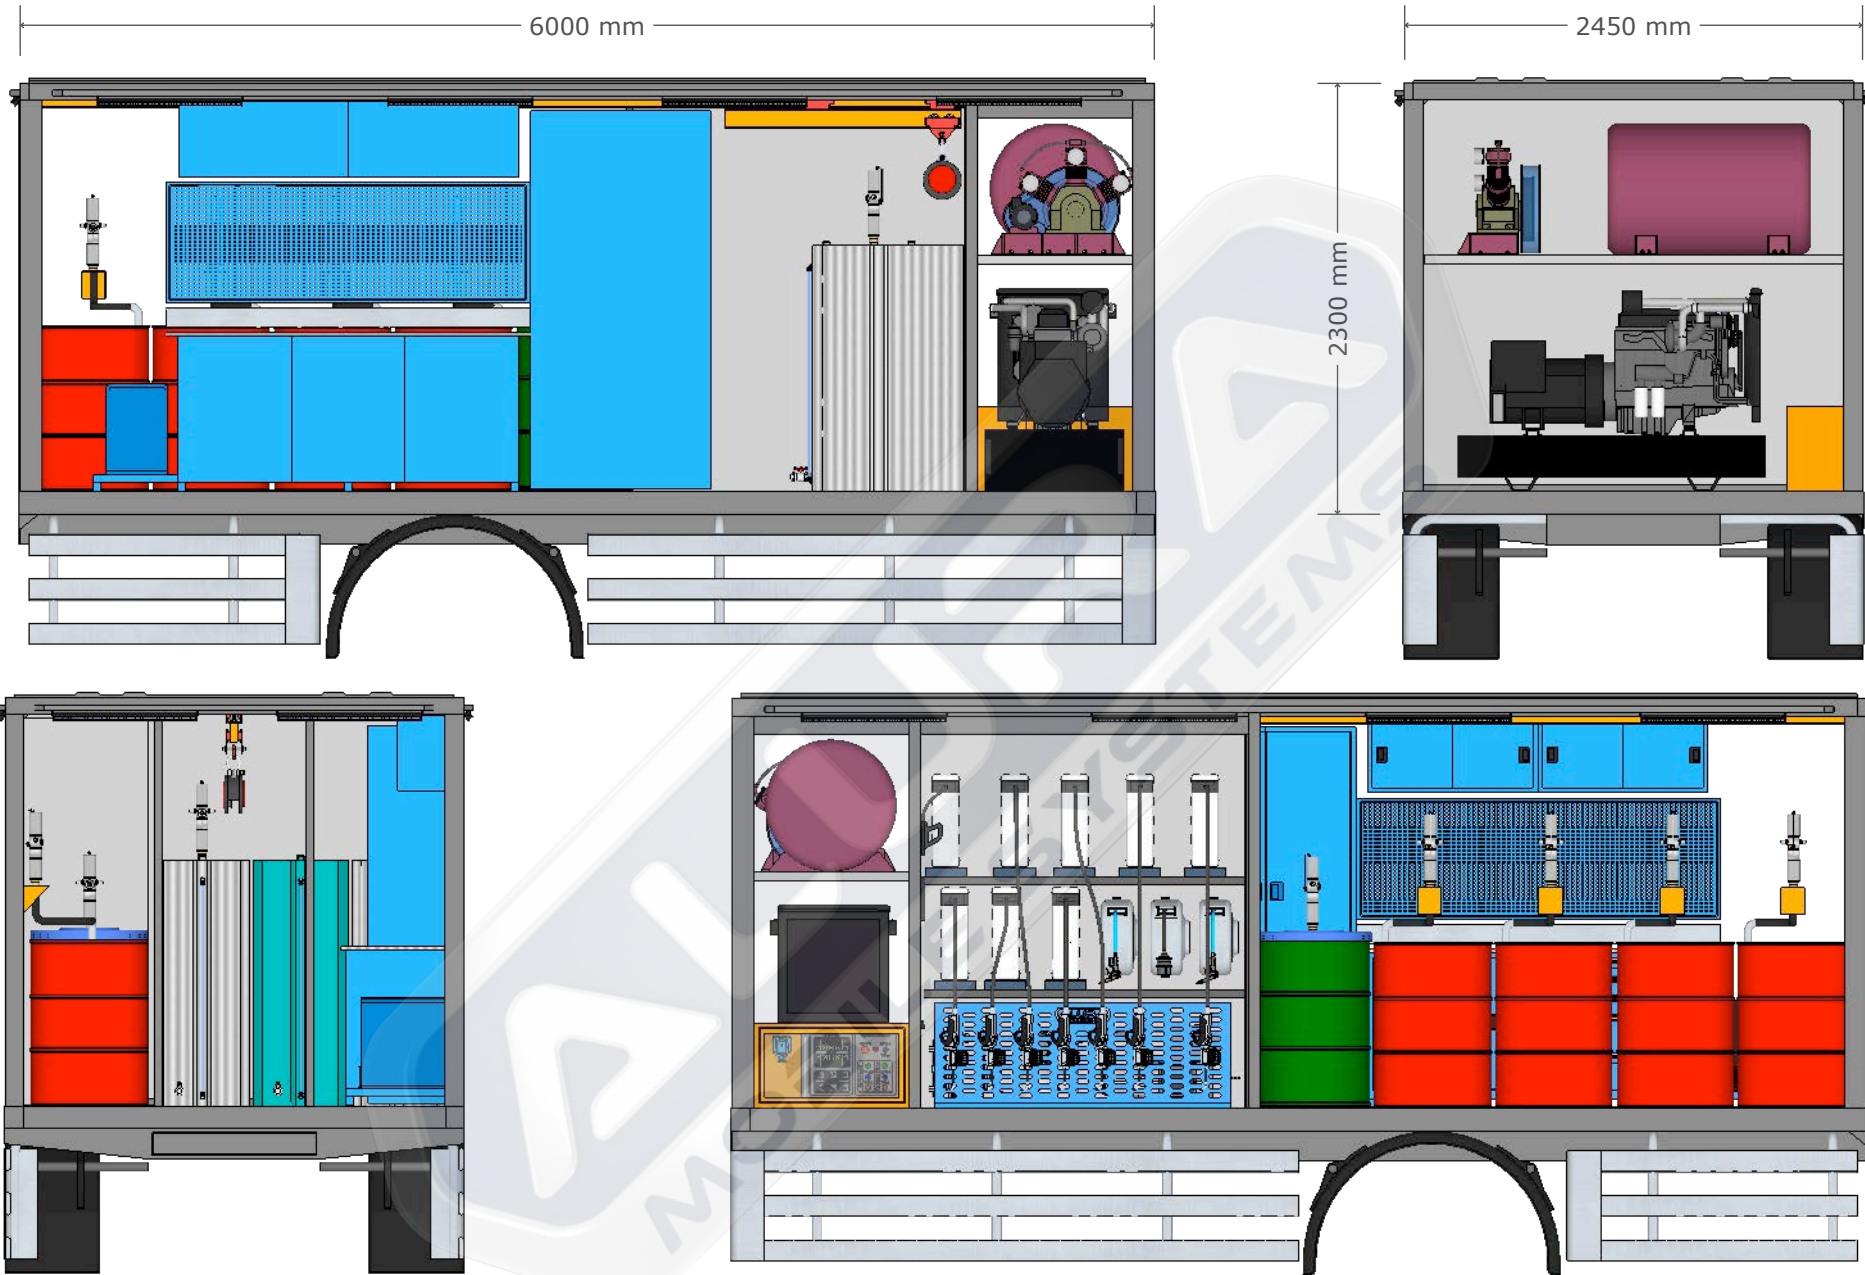


Project / Model
25.008
20" Lubrication Truck

Info
 MWS 2.1

Date : 20.01.2025
 Rev. : 00.00
 Per. : Metin ALCAR
 Tel. : 0544 242 04 91
 Mail : yavuz@aluratrailer.com

A 02

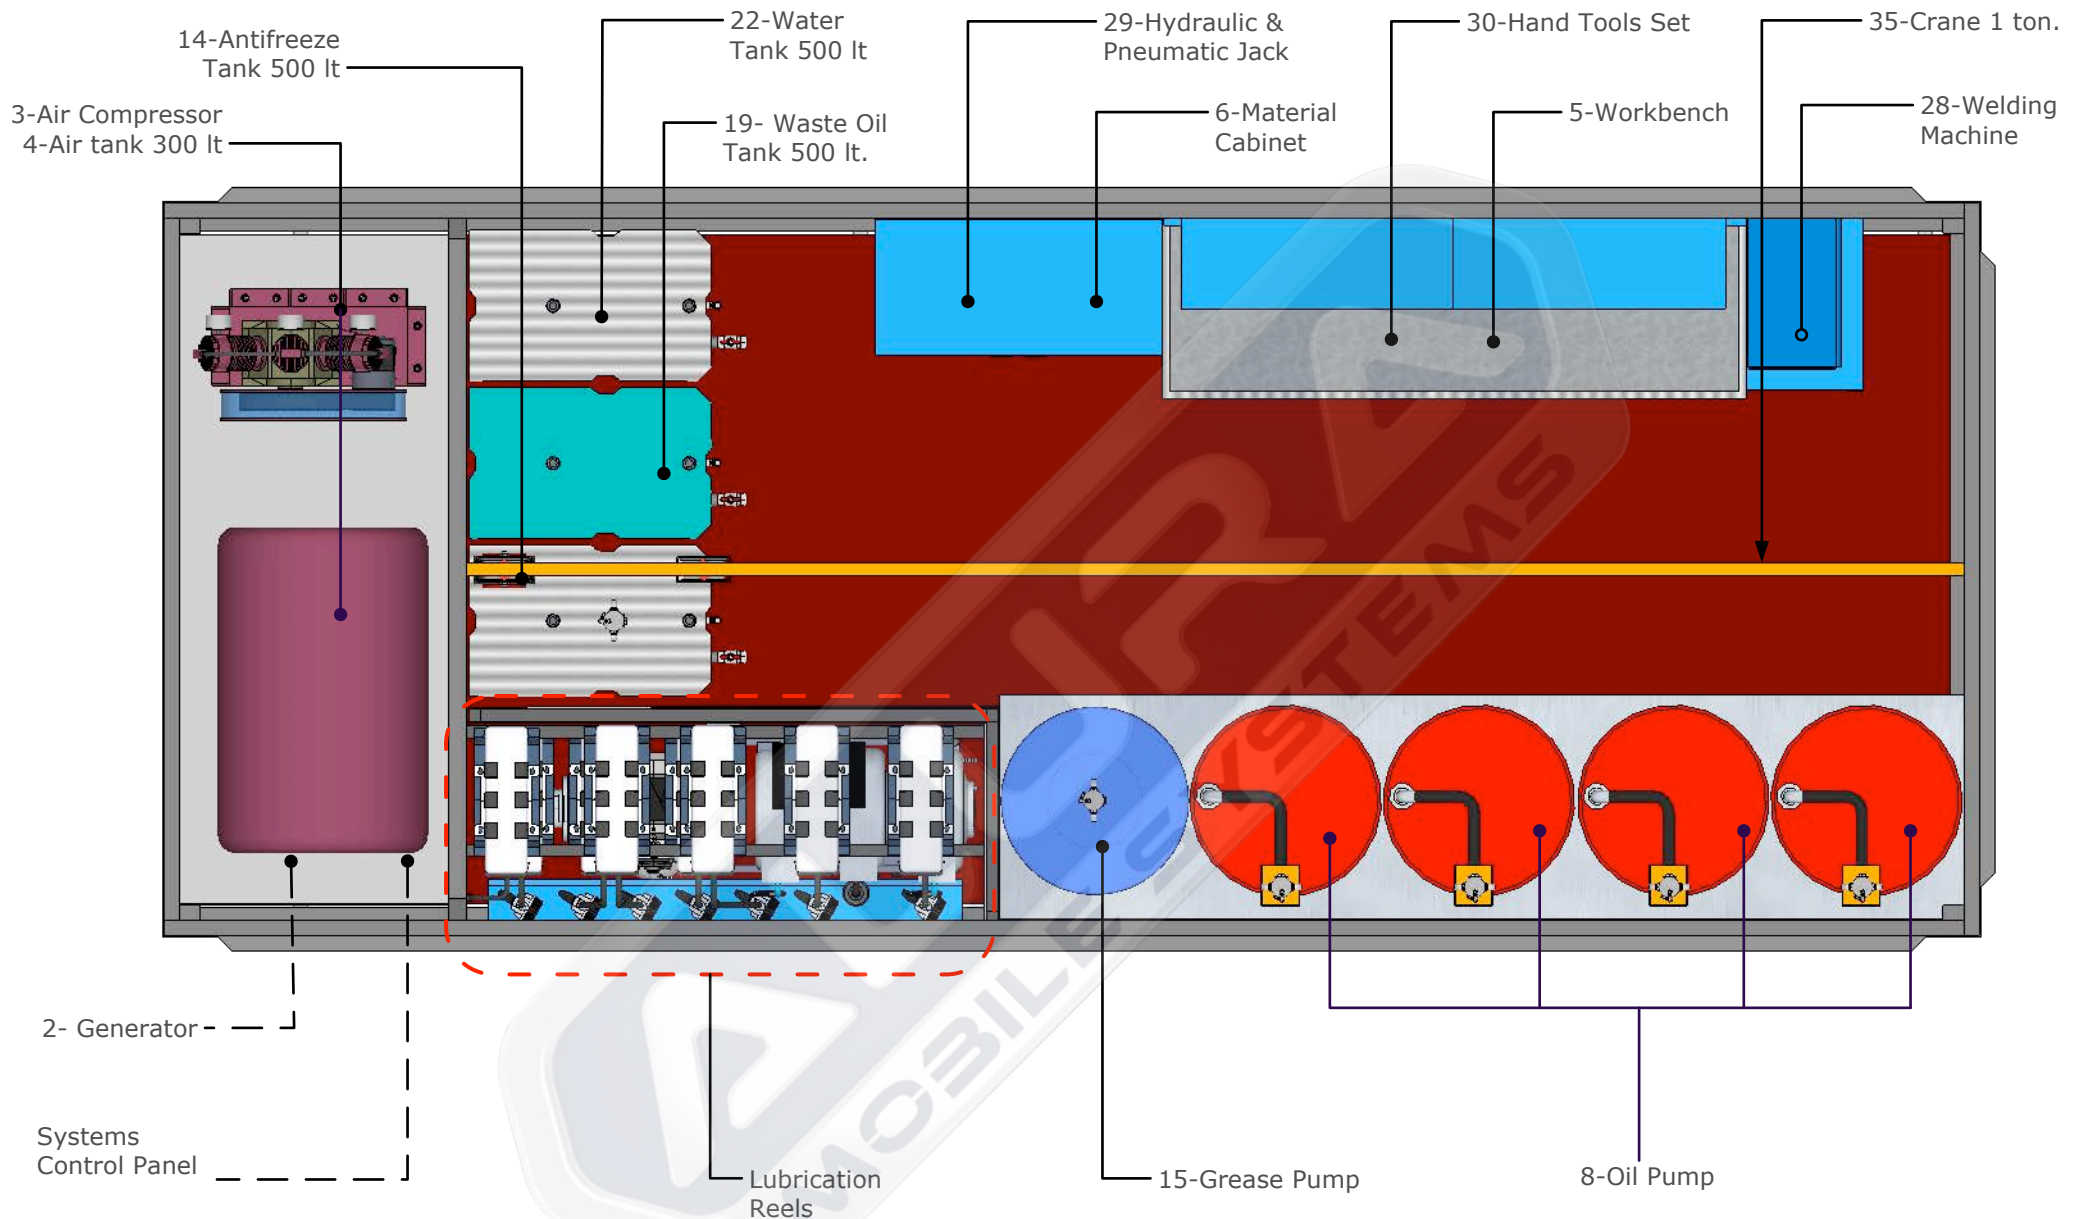

9-Oil Reel 15 mt.

20-Pressure Washer 15 mt

12-Collant Reel 15 mt

16-Grease Reel 15 mt

18-Waste Oil Reel 15 mt.

23-Hydrophone Pump


17-Waste Diaphragm Pump


24-Water Reel 15 mt.

27-Air Reel 15 mt.

26-Electric Reel 15 mt.

20-Pressure Washer

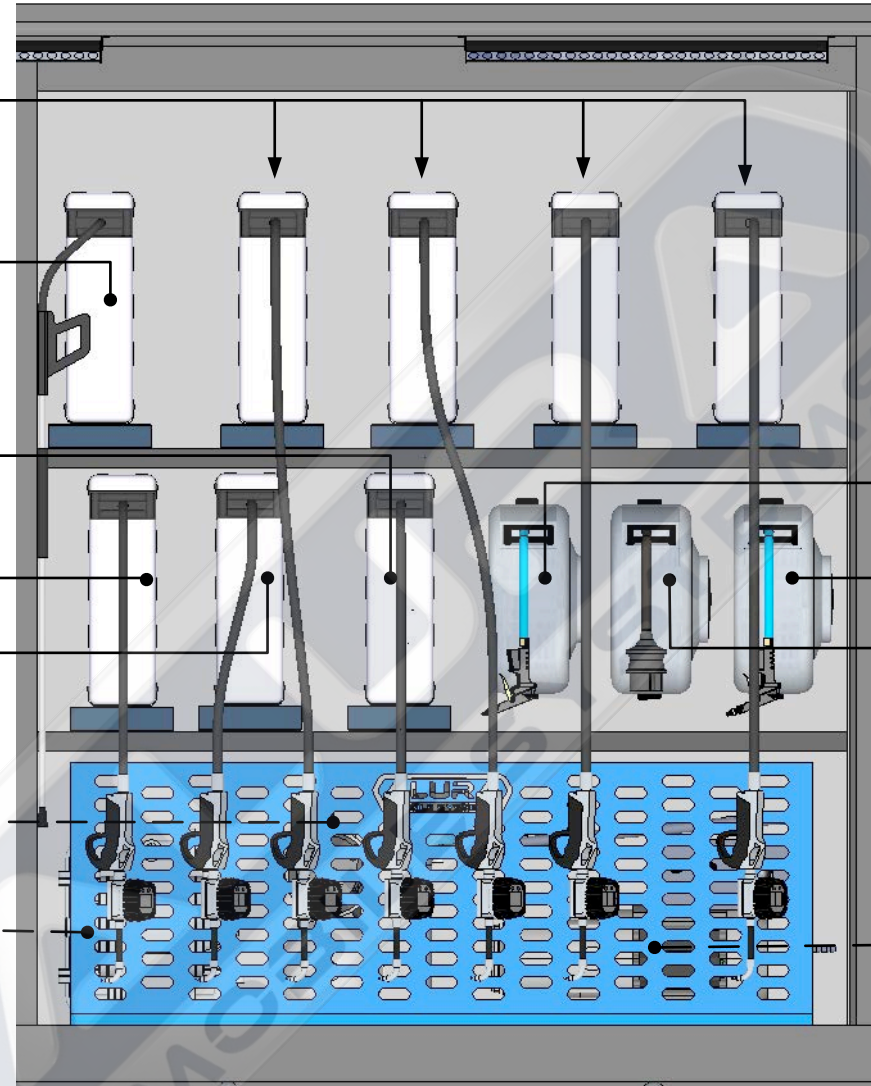

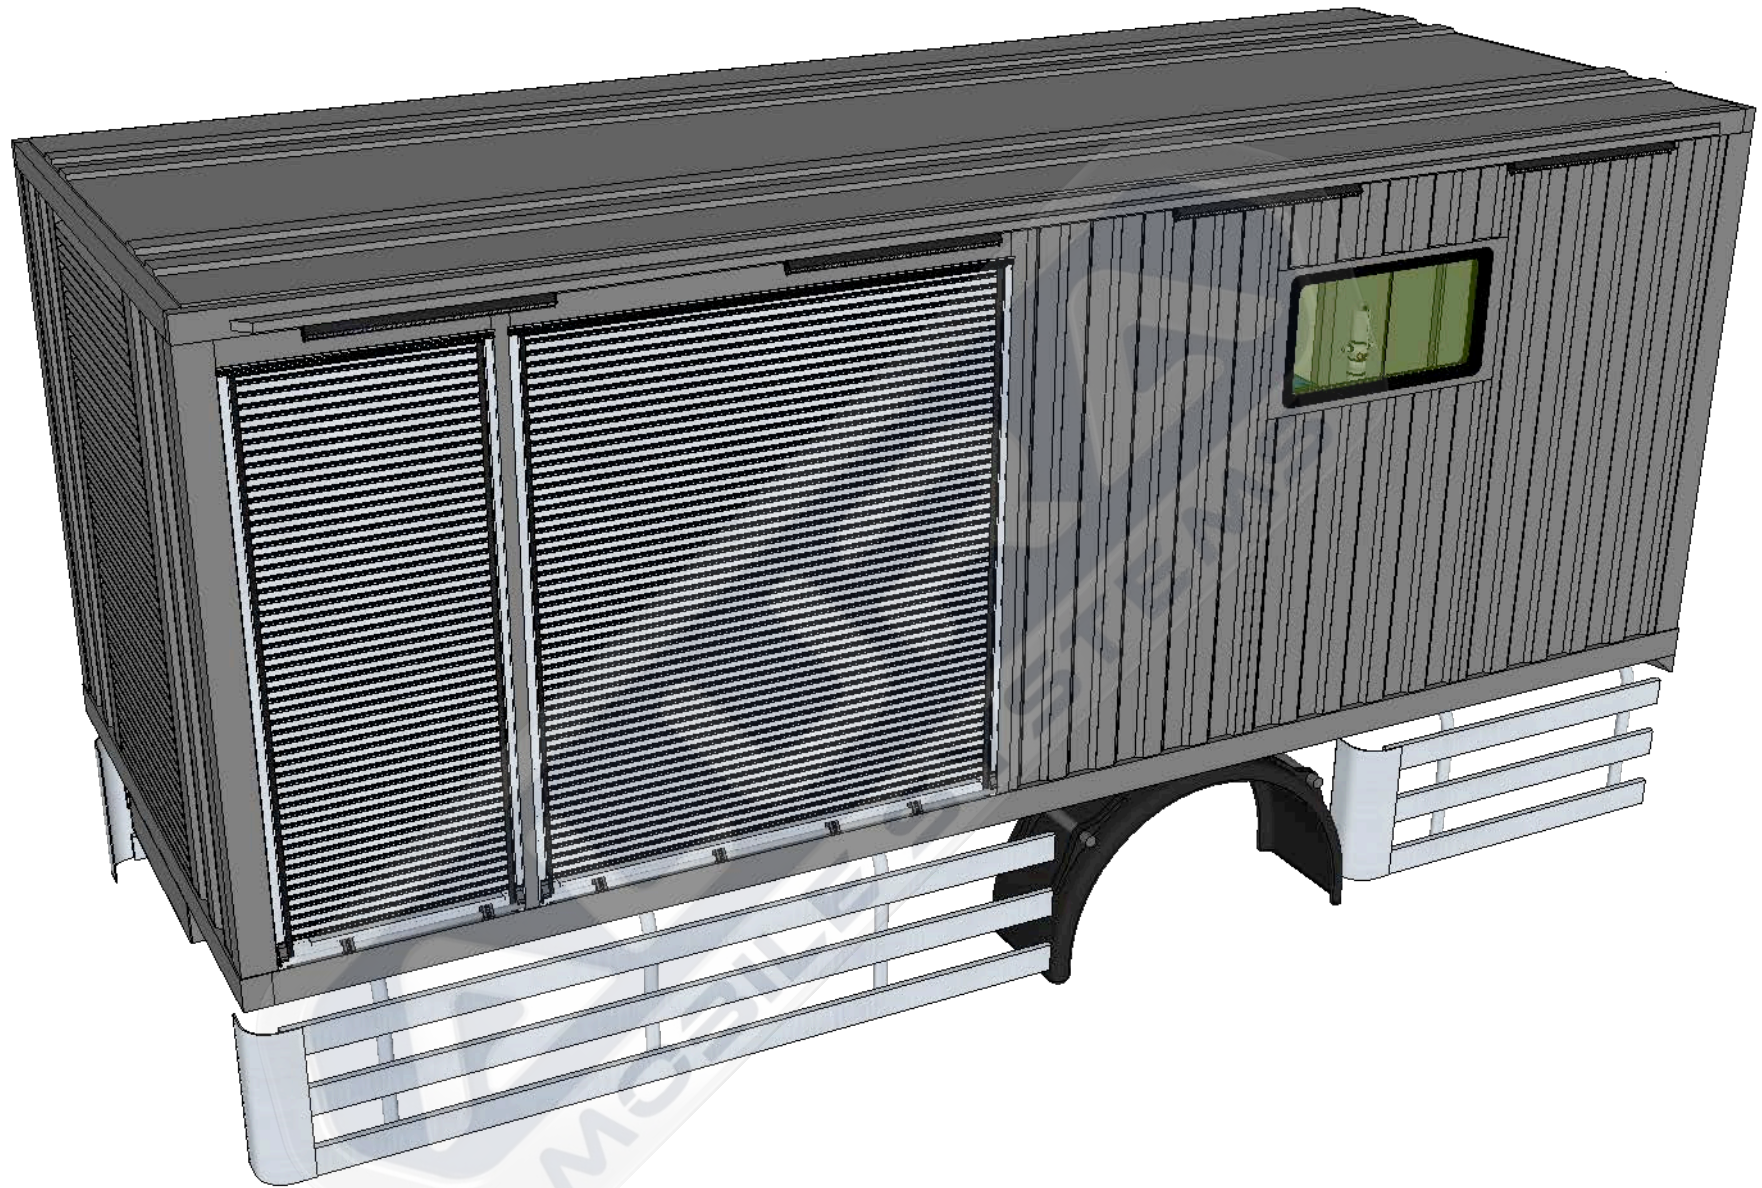

Project / Model

25.008

20" Lubrication Truck

Info

MWS 2.1

Date : 20.01.2025

Rev. : 00.00

Per. : Metin ALCAR

Tel. : 0544 242 04 91

Mail : yavuz@aluratrailer.com

A

05



Project / Model

25.008

20" Lubrication Truck

Info

MWS 2.1

Date : 20.01.2025

Rev. : 00.00


Per. : Metin ALCAR


Tel. : 0544 242 04 91


Mail : yavuz@aluratrailer.com


A

06


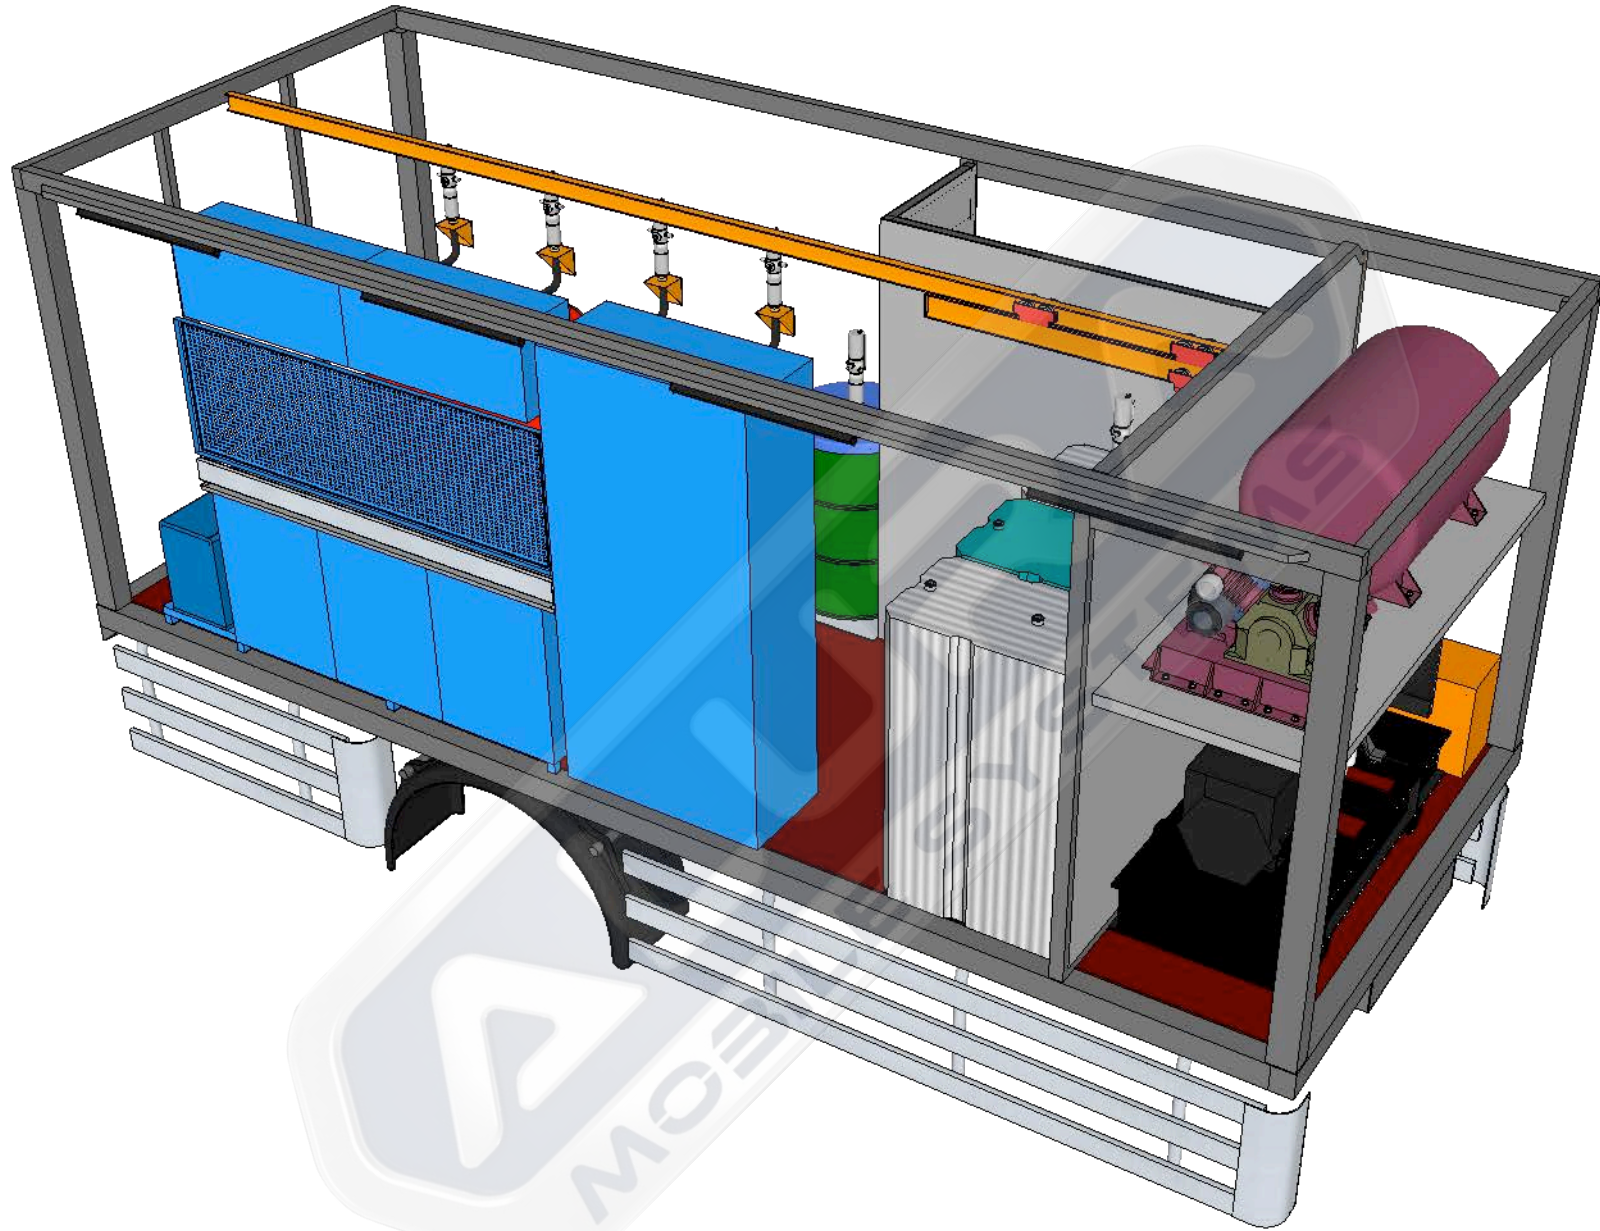


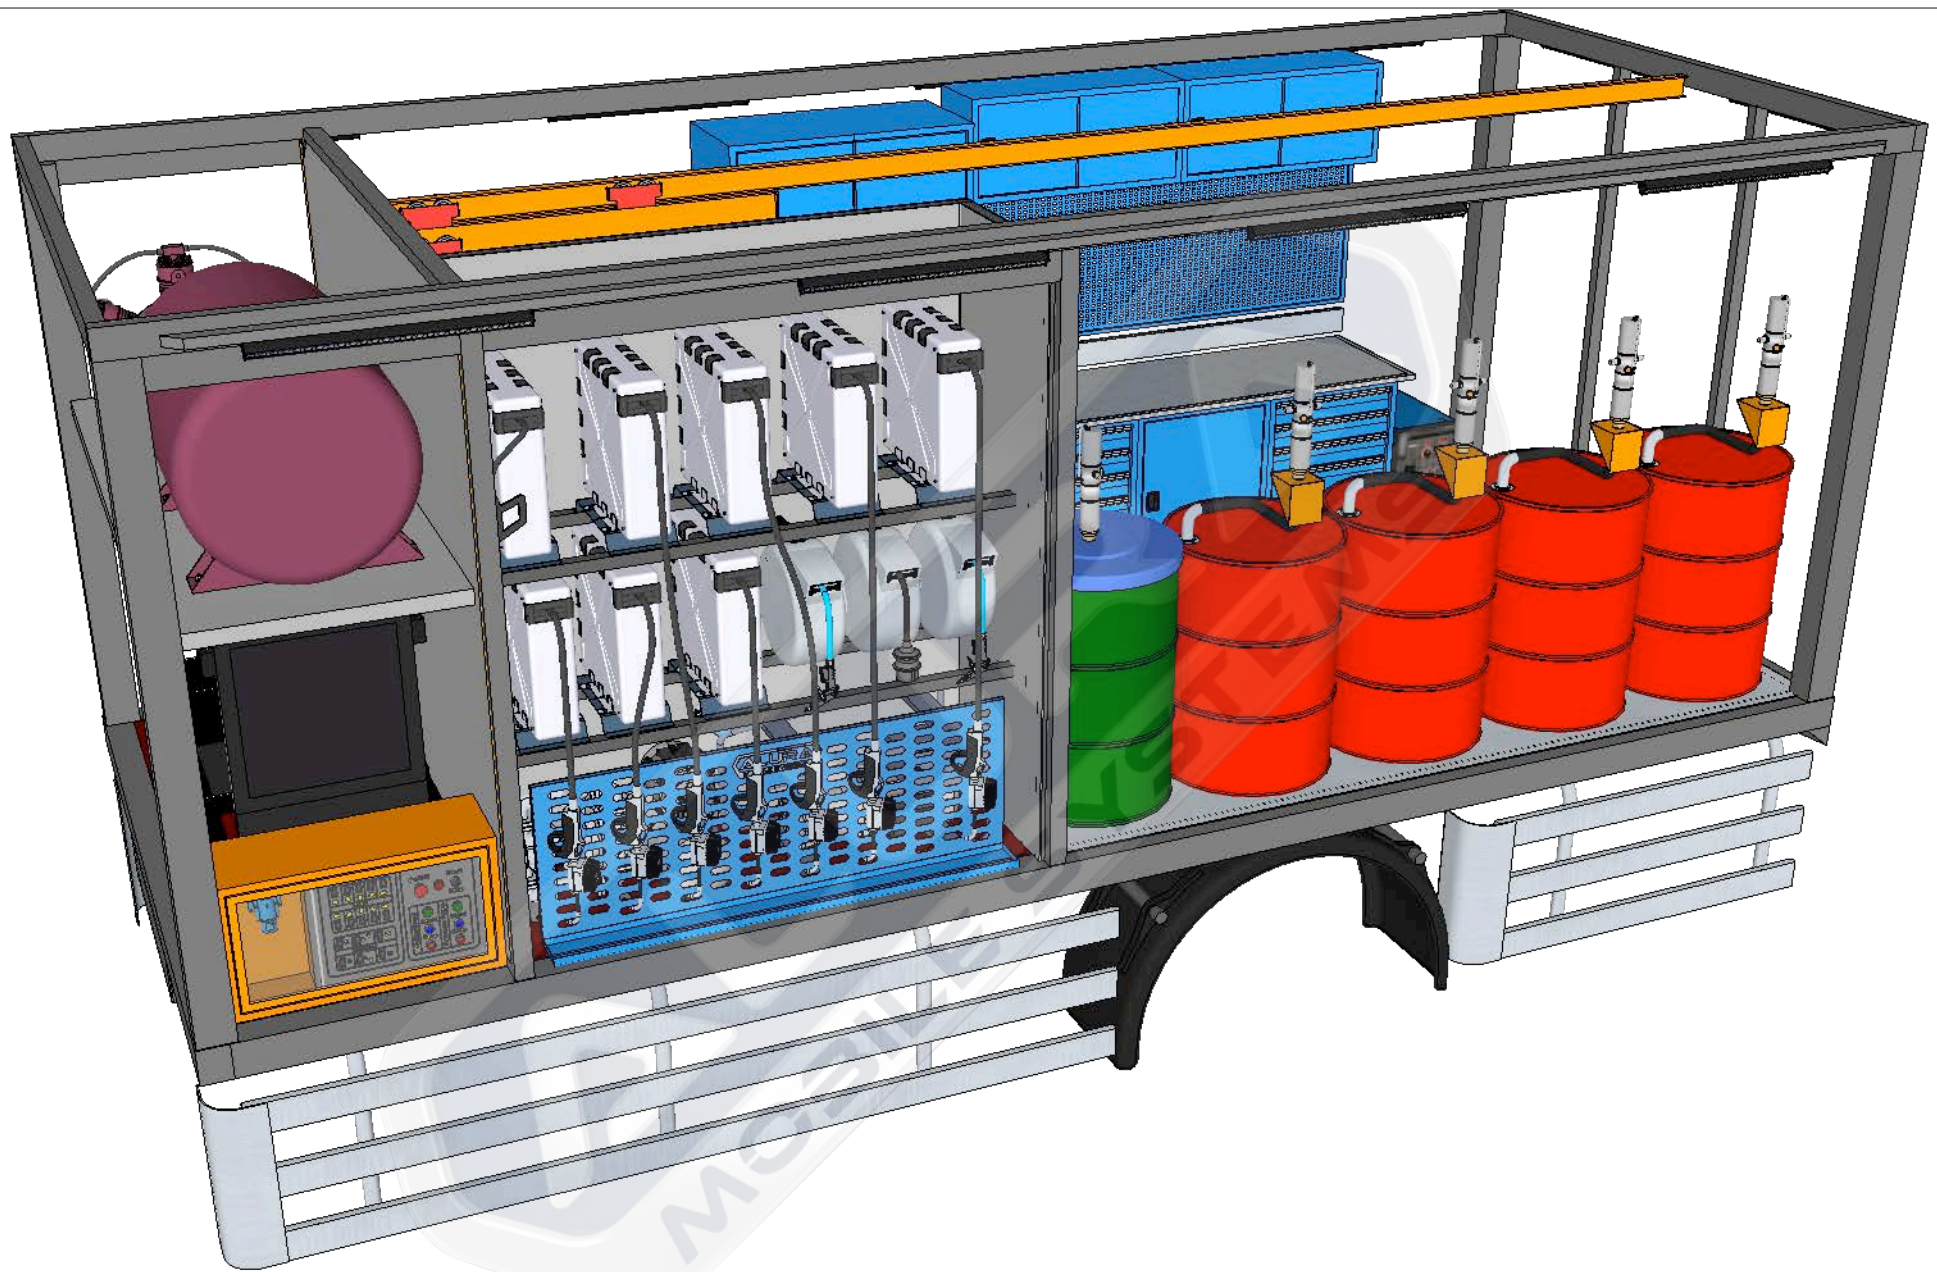

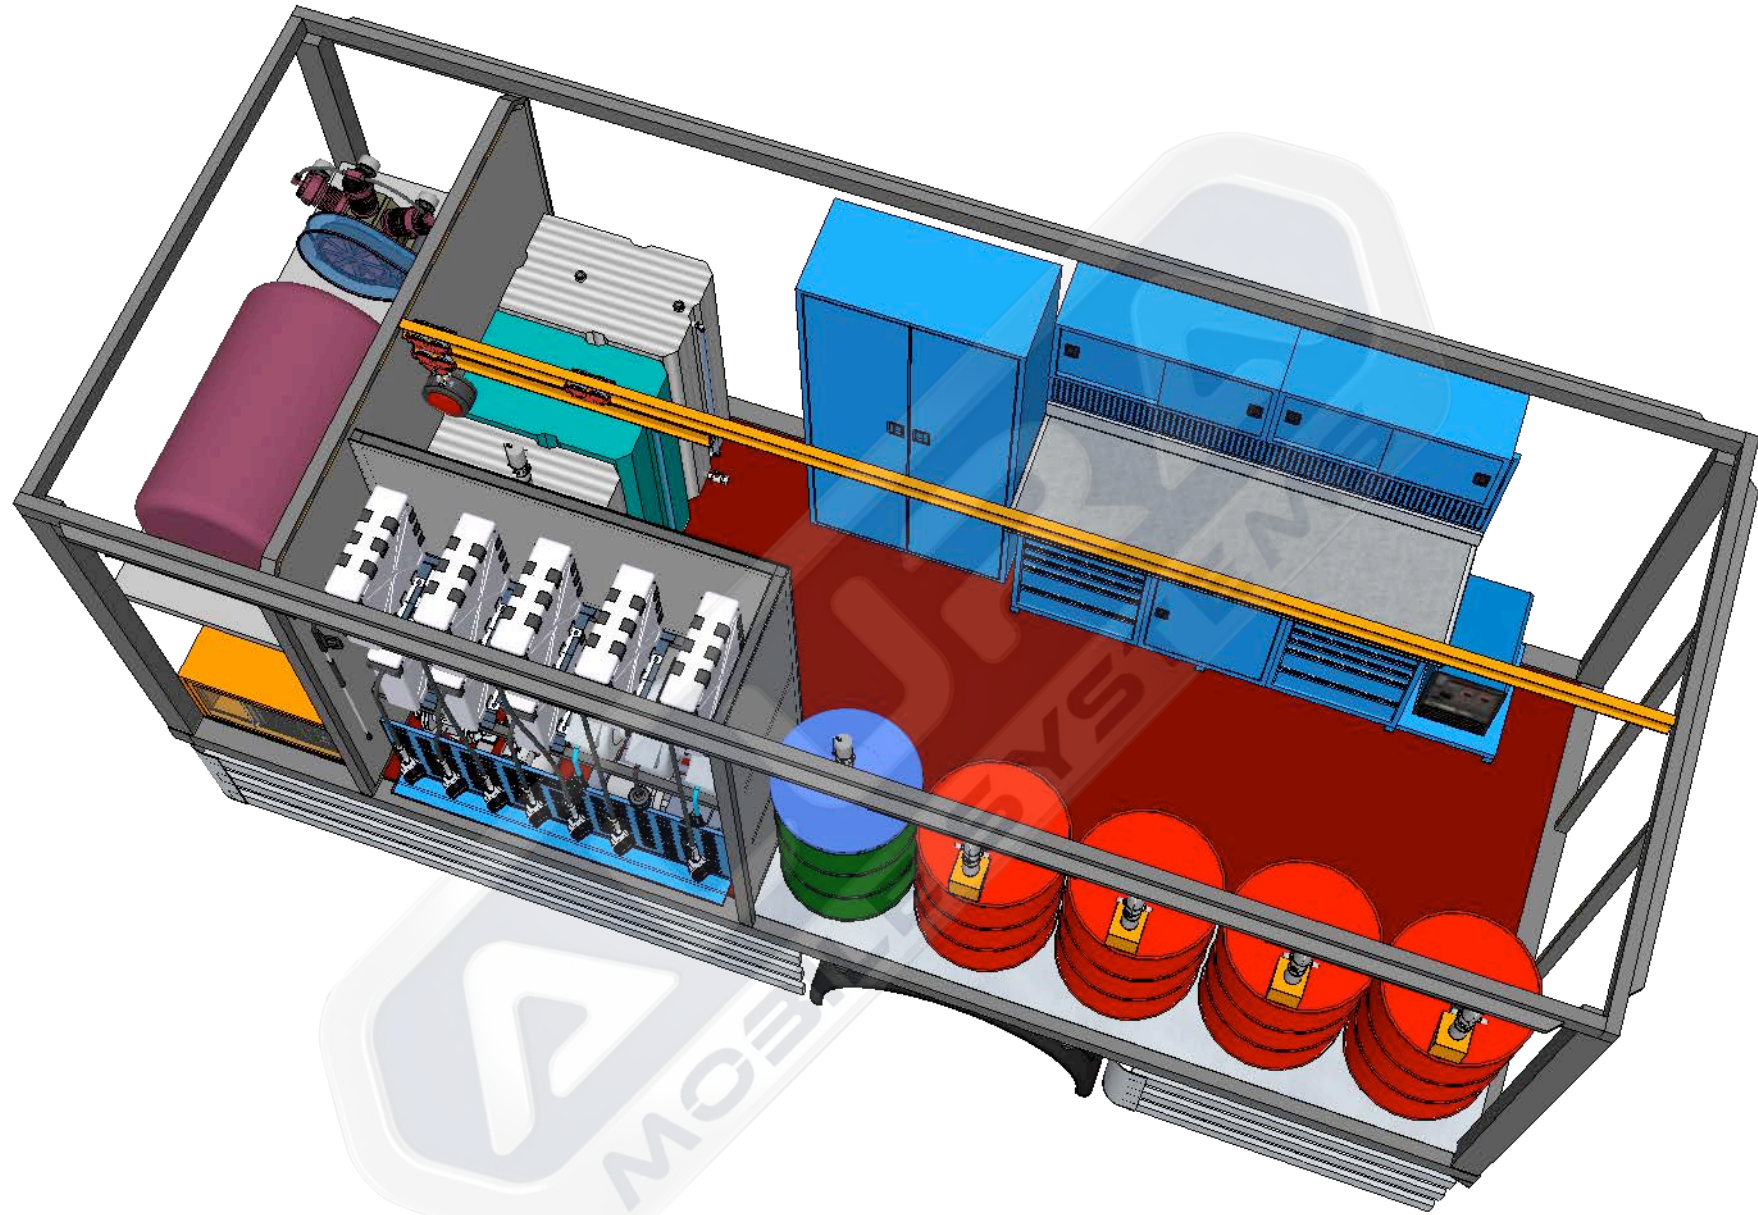

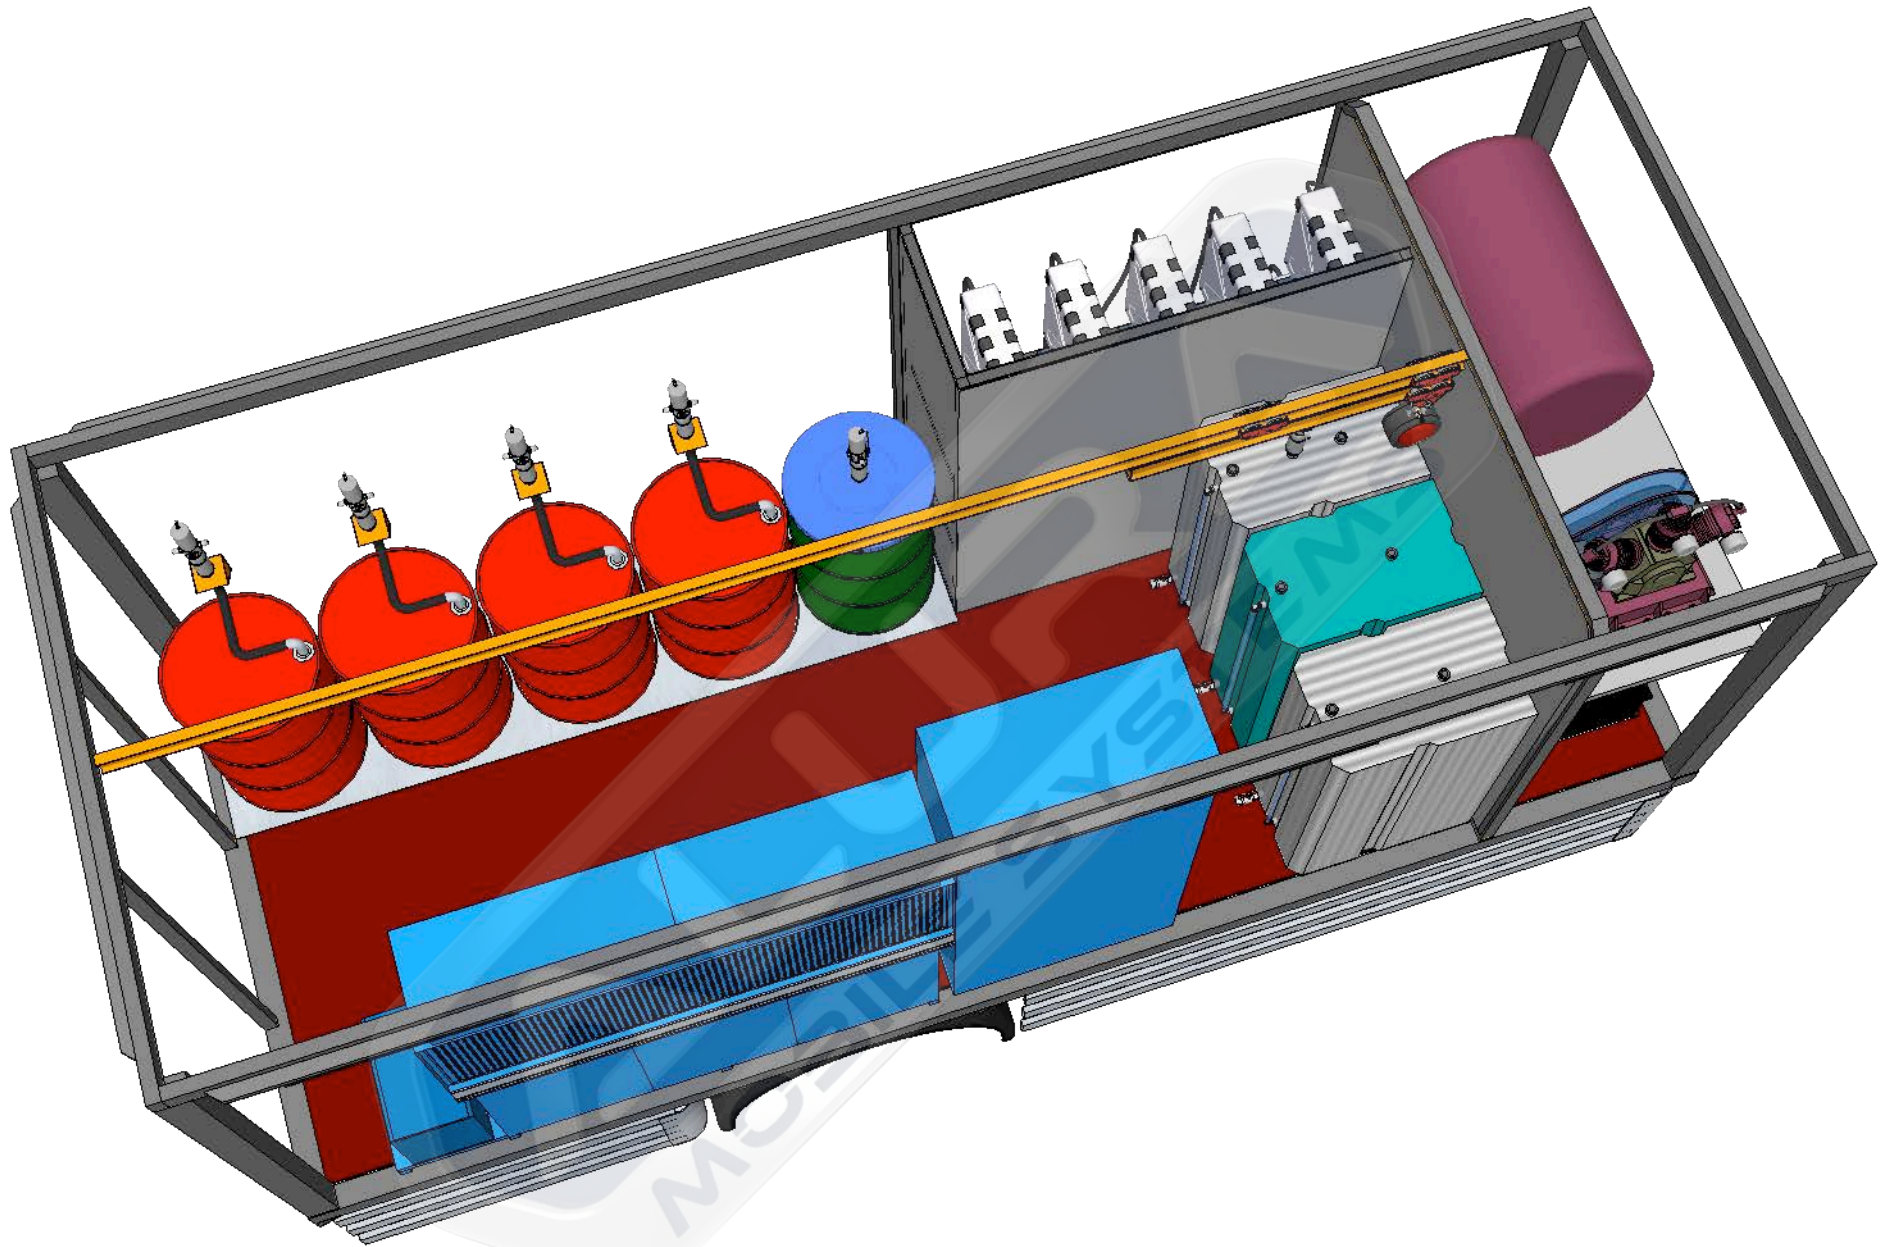

No	Equipment	Referans	Producer	Orjin	Piece
1	Lubrication Truck	25.008	Alura	Turkey	1

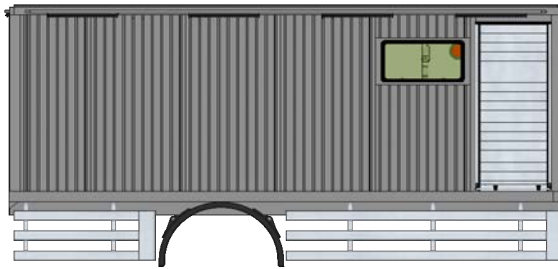

Dimensions / mm.	Length	6.000	Width	2.450	Height	2.300
------------------	--------	-------	-------	-------	--------	-------

Bodywork

MWS bent C type channel steel.
 Column sheets 3 mm. Panels 2 mm.
 Base cross members 80mm height 3mm.
 Base 18 mm Plywood.
 Sliding windows to usable areas.
 Stainless hinges and locks.



Sliding glass rear door.
 Monolithic crane connection channel to the body frame.
 Acrylic industrial chassis paint.
 Quick access rear bumper drawers.
 Metal parts are fixed to the chassis.

Outer Covering


Polyurethane Industrial Coating
 Resistant to chemicals.
 Hygienic, mold-proof, rust-proof and corrosion-proof.
 Retains its elasticity between 40C/200 C.
 Fire resistant CLASS A certificate.



Solvent-free, superior water resistance.
 Prevents damage that may occur as a result of impact.
 CE certified.

Insulation

Elastomeric Rubber
 Edges, Ceiling 18/40 mm.
 Provides high performance thermal insulation with its low thermal conductivity structure.
 Has a high water vapor diffusion



Used in system solutions with high condensation risk.
 Increases energy amount.
 Protects against pressure fluctuations.
 Unaffected by mold and microorganisms, antimicrobial.

Control Panel

Center control panel.
 Generator and compressor areas are quickly accessible cover.
 Electrical cables are hidden inside the insulated chassis.
 Cables in protective plastic sheath.















Polyurethane hose in air line duct.
 Mains Electricity Connection Input.
 Perimeter and interior lighting 220v.







Finishing








No	Equipment	Explanation	Reference	Manufacturer	Orjin	Piece
2	Generator Diesel		KJP28	Power	Turkey	1
		Standby/Prime Power: 28 kVa / 25 kVa Standard Voltage: 400/230 V / 3 Phase Engine Bran: Perkins Engine Model: X2.5G2 Alternator: Stamford RPM: 1500 rpm.		Frequency: 50 Hz. Water Cooling		
3	Pistone Compressor		AC 75E BM	Atlas Copco	Belgium	1
		Chassis Piston Air Compressor Engine Power: 7.5 hp Air Intake: 836 lt/min Revolution : 663 rpm Pressure : 15 bar Working Power : 380 V				
4	Air Tank		ALR12300	Alura	Turkey	1
		Capacity : 300 lt. Working Pressure: 15 bar. Test Pressure: 15 Bar. Sheet Thickness: 4 mm. Compressor Connection : 1" Air Outlet : 1/2"				
5	Work Bench		ALR11180	Alura	Turkey	1
		Work Bench Width: 1.800 mm Depth: 700 mm Height: 2.000 mm Number of Drawers: 10 Drawer Carrying Capacity: 60 kg.		Shelf Carrying Cap .: 80 kg. Socket 2 Pieces 25 mm MDF + Pvc on worktops Electrostatic powder paint Suspension boards modular		
6	Metal Cabinet		ALR18200	Alura	Turkey	1
		WxDxH: 1.000 x 450 x 2.000 mm Body and carriers 0.80 - 1.2 mm It is long-lasting and durable. The covers are double wing reinforced. Number of Shelves: 7 Pieces Shelf Carrying Cap .: 80 kg.		Variable drawer groups		
7	Aluminum Shutters		CLK100230	Celiksın	Turkey	3
		Manuel Working Locking Systems Size : 1000 x 2300 mm 2 pcs. 1500 x 2300 mm 1 pcs				

No	Equipment	Explanation	Reference	Manufacturer	Orjin	Piece
8	Oil Pumps		P/N 36060	Raasm	Italy	4
		Pneumatic pumps for oil Flow rate: 18 l / min Air working pressure: 6/8 bar Average air consumption: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE				
9	Oil Hose Reels		P/N 9430.402	Raasm	Italy	4
		Pressure: 150 bar Length: 15 mt Compatible fluids: Oils and Similar Material: Painted Steel Inlet-Outlet : G 1/2 ""f - G 1/2 ""m Pressure - Size: 1/2 "" - 160 bar				
10	Oil Guns for dispensing		P/N 37758	Raasm	Italy	4
		Flu: Technopolymer Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes				
11	Antifreeze Pump		P/N 33360	Raasm	Italy	1
		Pneumatic pumps for Antifreeze Flow rate: 30 l / min Air inlet - Fluid Out : G 1/4 - G 1/2 Air working pressure: 6/8 bar Average air consumption: 370 l / min			Noise level: 81 dB Weight : 7,4 kg	
12	Antifreeze Hose Reels		P/N 8420.401	Raasm	Italy	1
		Pressure: 150 bar Hose Length: 15 mt Compatible fluids: Antifreeze Material: Painted Steel Inlet-Outlet : G 1/2 ""f - G 1/2 ""m Operating temperature: -40 / +100			Pressure - Size: 1/2 "" - 160 bar	
13	Antifreeze Guns for dispensing		P/N 37762	Raasm	Italy	1
		Flow rate : 40 l/min Pressure : 70 bar Grip: Aluminum Terminal: Flexible Inlet swivel joint: G 1/2" (f) Filter: Yes				

No	Equipment	Explanation	Reference	Manufacturer	Orjin	Piece
14	Antifreeze Tank		ALR21200	Alura	Turkey	1
		Capacity : 500 Ltr Made of Stainless : 2 mm Level Indicator : Manuel Filling tap : 1" Pump stabilizer : 1" Discharging valve : 1"				
15	Lubrication Grease		64195	Raasm	Italy	1
		Grease disp. kit for drums external Ratio: 50:1 Flow rate: 1500 g/min For drums with internal: ø 370/420 Compatible fluids: Greases, medium / high viscosity		Air working pressure: 6/8 bar Average air consumption: 330 l / min Noise level: 81 dB Weight: 4.6kg Grease guns Grease coupler: special 4-jaw		
16	Grease Hose Reels		995.518	Raasm	Italy	1
		Pressure: 400 bar. Hose Length: 15 mt. Compatible fluids: Water Swivel joint: Stainless Metal Characteristic: Fixed Material: Painted steel				
17	Waste Oil / Diagram Pump		33/2011TPT2	Raasm	Italy	1
		Flow rate: 70 l / min Max pressure: 8 bar. Max cycles for minute: 400 cpm. Max working temperature: 100 ° C Noise level: 70 dB. Air working pressure: 2/6 Bar.		Membranes: EPDM		
18	Waste Oil Hose Reels		P/N 9430.104	Raasm	Italy	2
		Pressure: 20 bar Length: 15 mt Compatible fluids: Oils and Similar Material: Painted Steel Inlet-Outlet : G 1/2 "f - G 1/2 "m Pressure - Size: 1/2 " - 160 bar"				
19	Waste Tank 500 lt		ALR22200	Alura	Turkey	1
		Volume: 500 lt Metal prism tank Occupancy indicator Filler caps Pump stabilizer Discharge 1" valve				

No	Equipment	Explanation	Reference	Manufacturer	Orjin	Piece
20	Washing Machine - Cold / Heat		ST 2100 CS	Rottest	Turkey	1
		Pressure: 200 bar Flow rate: 1.260 lt/hour Engine Power: 7.5 hp Voltage - Phase 380V-3 50 Hz Weight: 74 kg. Spray gun			Heating System: Diesel	
21	Washing Hose Reels		995.518	Raasm	Italy	1
		Pressure: 400 bar. Hose Length: 15 mt. Compatible fluids: Water Swivel joint: Stainless Metal Characteristic: Fixed Material: Painted steel				
22	Water Tank 500 lt		ALR21200	Alura	Turkey	2
		Capacity : 500 Ltr Made of Stainless : 2 mm Level Indicator : Manuel Filling tap : 1" Pump stabilizer : 1" Discharging valve : 1"				
23	Water Pump		BP 3.200	Karcher	Germany	1
		Maximum Motor power : 1000 W Maximum Water Flow: 4500 l/hour Maximum pressure: 50/5 m/bar Working pattern: 1.9 - 3 bar Maximum suction : 8 m Connection type : G1			Power Cable H05RN-F : 1 m Weight without accessories : 14.7 kg	
24	Water Reel		880100	Mavel	Italy	1
		Hose Diameter: 10x15 Mm Hose Length: 20 Mt Working Pressure: 15 Bar Inlet and Outlet Dim.: 3/8" F - 3/8" M Automatic Rewind Plastic outer casing			steel swivel wall bracket It can be easily stopped by the end user thanks to the latched stop device. Size: 50x43.5x23.5 cm Weight: 8.3 Kg	
25	Waste oil transfer		OZ10050	Özsay	Turkey	1
		Oil collection under the vehicle Swivel Wheel Metal case Capacity : 50 lt				

No	Equipment	Explanation	Reference	Manufacturer	Orjin	Piece
26	Cable Roller		820722	Mavel	Italy	1
		Three Phase : 400 Volt Cable Thickness: 5x2.5 mm Cable Length: 20 Mt Cable Type : H07RN-F Power : 1000-3000 W Auto Rewind		Plastic outer cover steel swivel wall bracket Weight: 9 Kg Dimensions: 42x39x23 Cm		
27	Air Reel		880100	Mavel	Italy	1
		Hose Diameter: 10x15 Mm Hose Length: 20 Mt Working Pressure: 15 Bar Inlet and Outlet Dim.: 3/8" F - 3/8" M Automatic Rewind Plastic outer casing		steel swivel wall bracket It can be easily stopped by the end user thanks to the latched stop device. Size: 50x43.5x23.5 cm Weight: 8.3 Kg		
28	MMA Welding Machine		ID 400 E	Magmaweld	Turkey	1
		Mains Voltage : 400 V Power Drawn from the Network: 19.6 kVA Welding Current Setting Range: 5 - 350 A Rated Welding Current: 350 (35%) A Open Circuit Voltage: 86 V Electrode Diameter: 1.60 - 5.00 mm		Dimensions : 585 x 307 x 515 mm Weight : 32 Kg Protection Class IP21		
29	Hydraulic & Pneumatic Jack		GMS 110	Gemasa	Turkey	1
		Folding Arm Mobile Jack Lifting Capacity: 40/25 tons Min. Height: 180 mm Mak. Height: 273 mm Lifting Distance: 40 / 85-25 / 80 mm Weight: 58 kg				
30	Hand Tools Set 62 pcs.		8420005063	İzeltaş	Turkey	1
		Mechanical Tool Kit - 62 Pieces Metal Tool Box 5 Eyes 195*420*210 Chrome Tape Measure 5 Mt Magnetic Bit Holder Short Flat / Stars / Torx Bit Tip (25mm) Opaque Star Screwdriver		135 mm Control Pen - 240 mm Universal Fort Pliers Pvc - Hexagon Socket Wrench 1/2" - 250 mm Long Intermediate Handle 1/2" - 70 mm Joint 1/2" - 250 mm Ratchet Handle 1/2" 32 Teeth - Allen Key Hexagon		
31	Air Regulator		OPT3042FRL	Osaka	Japan	1
		Air Inlet : 1/2" Filter : 20u Working Pressure: 05-9.9 atu Operating Temperature: 5-60°C Water Capacity: 80 ml Air Permeability: 2200 lt/min				

No	Equipment	Explanation	Reference	Manufacturer	Orjin	Piece
32	Pneumatic Water Trap		OPT - P 1000	Osaka	Japan	1
		Length: 215 mm Working Pressure: 1-70 kg/cm ² Max. Working Flow Rate: 400 lt/min Max. Pressure: 14 bar Fluid Temperature: 5-60° C Inlet Connection: 1/2"		Outlet Connection: 1/2" Moisture Separation: 96% Weight: 0.70 kg		
33	Outdoor Lighting		CSR 800	CSR	Turkey	6
		Operat. Voltage/Current:DC 12/15V 1.4A Driving Type: Linear current and voltage controlled driver Light Source: 3W 12pcs power LED LENS Feature: 25° collimator LENS White:5000-7000K		Physical Properties : Polycarbonate plastic black aluminum profile		
34	Lighting		EAT1200	EAT	Turkey	6
		Body : Polycarbonate RAL 9003 body , Metal lock clip Diffuser: Polycarbonate opal cover Light Source: Mid Power LED Power: 55 W Input Voltage: 220-240V - IP 65				
35	Electric Crane		ATS600/1200	Atlas	Kore	1
		Capacity: 600 / 1.200 kg Lifting height: 10 mt Lifting speed: 10/5 m / min Rope length: 20 mt Engine power: 930 W Voltage: 220-50 V / Hz				
36	Fire Extinguisher		STR1806	Star	Turkey	2
		ABC Grade Fire Extinguishing Powder 6 Kg Capacity MAP Rate 40% Body made of A1 7114 Quality Plastered Sheet 18 Bar Working Pressure		0.70 Micron Electro Static Paint It Has a Refillable Structure.		



No	Equipment	Reference	Manufacturer	Orjin	Piece
1	Lubrication Truck	25.008	Alura	Turkey	1
2	Generator Diesel	KJP28	Power	Turkey	1
3	Pistone Compressor	AC 75E BM	Atlas Copco	Belgium	1
4	Air Tank	ALR12300	Alura	Turkey	1
5	Work Bench	ALR18200	Alura	Turkey	1
6	Metal Cabinet	ALR18200	Alura	Turkey	1
7	Aluminum Shutters	CLK100230	Celiksan	Turkey	3
8	Oil Pumps	P/N 36060	Raasm	Italy	4
9	Oil Hose Reels	P/N 9430.402	Raasm	Italy	4
10	Oil Guns for dispensing	P/N 37758	Raasm	Italy	4
11	Antifreeze Pump	P/N 33360	Raasm	Italy	1
12	Antifreeze Hose Reels	P/N 8420.401	Raasm	Italy	1
13	Antifreeze Guns for dispensing	P/N 37762	Raasm	Italy	1
14	Antifreeze Tank	ALR21200	Alura	Turkey	1
15	Lubrication Grease	64195	Raasm	Italy	1
16	Grease Hose Reels	995518	Raasm	Italy	1
17	Waste Oil / Diagram Pump	33/2011TPT2	Raasm	Italy	1
18	Waste Oil Hose Reels	P/N 9430.104	Raasm	Italy	2
19	Waste Tank 500 lt	ALR22200	Alura	Turkey	1
20	Washing Machine - Cold / Heat	ST 2100 CS	Rotttest	Turkey	1
21	Washing Hose Reels	995518	Raasm	Italy	1
22	Water Tank 500 lt	ALR21200	Alura	Turkey	2
23	Water Pump	BP 3.200	Karcher	Germany	1
24	Water Reel	880100	Mavel	Italy	1
25	Waste oil transfer	OZ10050	Özsay	Turkey	1
26	Cable Roller	820722	Mavel	Italy	1
27	Air Reel	880100	Mavel	Italy	1
28	MMA Welding Machine	ID 400 E	Magmaweld	Turkey	1
29	Hydraulic & Pneumatic Jack	GMS 110	Gemasa	Turkey	1
30	Hand Tools Set 62 pcs.	8420005063	İzeltaş	Turkey	1
31	Air Regulator	OPT3042FRL	Osaka	Japan	1
32	Pneumatic Water Trap	OPT - P 1000	Osaka	Japan	1
33	Outdoor Lighting	CSR 800	CSR	Turkey	6
34	Lighting	EAT1200	EAT	Turkey	6
35	Electric Crane	ATS600/1200	Atlas	Kore	1
36	Fire Extinguisher	STR1806	Star	Turkey	2